


# Premolded cable termination, indoors

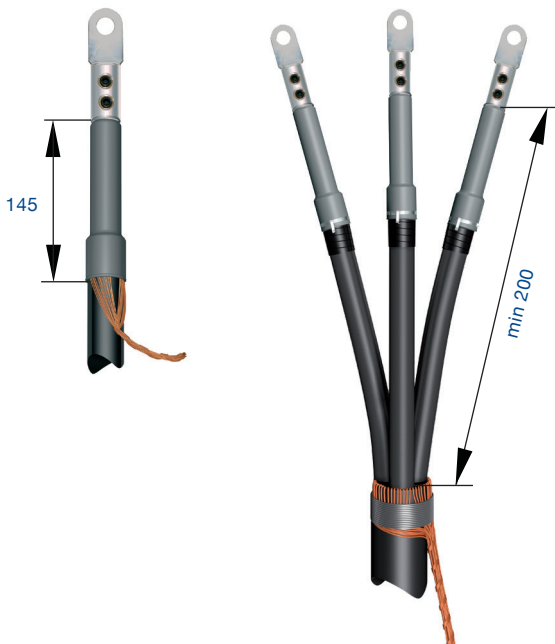

**Use**

Premolded cable termination for XLPE- and EPR-insulated cables 1- or 3-core with Al or Cu conductor for 6.6 / 7.2 kV, indoors. It can also be installed in an indoor humid environment\*.

**Standards**

- Meets the requirements of:
- CENELEC, HD 629.1 S1

**Design**

Premolded cable termination made of silicone rubber with integrated field control.

The length of the termination is approximate 145 mm which also makes it suitable for installations in narrow spaces.

The termination is supplied in kits for 3 single-core cables.

**Note:**

- Cable lugs are to be ordered separately.
- Branch seal TSH for 3-core cable is to be ordered separately.

\* For the best watertightness in an indoor humid environment, order branch seal kit TSH. See page 55.

**Always select products by Insulation diameter.**

Insulation diameter mm	Conductor cross section mm <sup>2</sup>	Designation	Weight kg/kit
<b>3-core / three 1-core</b>			
10.5–15	10–35	SOT 101-3	0.2
12.9–25.8	50–185	SOT 102-3	0.2
21.4–34.9	185–500	SOT 103-3	0.2