


**600/1000 V 3c Service cables  
with combined neutral and earth conductor AL**  
**Low voltage**

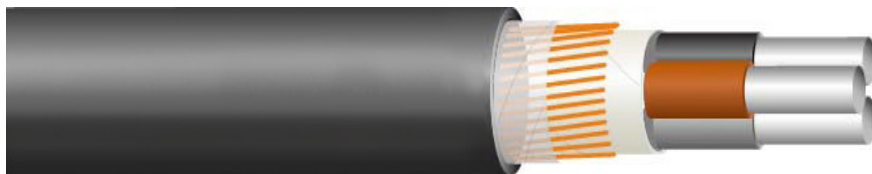

**Application:**

<b>Application</b>	600/1000 V A.C. Service cable
<b>Conductor temperature</b>	Max. 90 °C
<b>Short circuit temperature</b>	Max. 250 °C
<b>Installation temperature</b>	Min. -10 °C
<b>Min. radius of bend</b>	8 x D
<b>Max. pullings tension</b>	Directly on conductor max 30 N/mm <sup>2</sup> of total conductor cross section

**Construction:**

<b>Conductor</b>	Circular solid aluminium conductor
<b>Insulation</b>	XLPE
<b>Colour marking of core</b>	Brown, black and grey
<b>Screen</b>	Concentric layer of copper wires
<b>Outer sheath</b>	PVC, black

**Technical:**

<b>Standard</b>	BC 7870-3.11 and HD 603 55
<b>Marking of sheath</b>	ELECTRIC CABLE 600/1000 V BS7870-3.11 nkt cables 3 x "Dimension" AL "Year" "Metres"
<b>Rated voltage</b>	1000 V between phases
<b>Standard length</b>	250 m

**Technical properties:**

Number fo cores and cross-section	Number and diameter of wires in concentric conductor	Insulation thickness	Outer diameter	Approx weight	Standard length	Diamter of drum	Product number
Number x mm <sup>2</sup>	Number x mm	mm	mm	kg/km	m	m	
3 x 25	27 x 0,86	0,9	23	625	250	0,9	TJX420003
3 x 35	37 x 0,86	0,9	24,5	790	250	0,9	TJX42074

All rights reserved. Any unauthorized usage, redistribution or reproduction of part or all of the content in any form will constitute an infringement of copyright. The data are only indicative and should not be considered a binding representation or warranty from NKT concerning a product's properties or usability. The data page is not exhaustive and should be read in conjunction with NKT other product data sheets, whether published or not. NKT reserves the right to change the data page without prior notice.